## **SPECIFICATIONS**

WEIGHT<sup>†</sup>

**DIMENSIONS** 

 Length (between pulling faces)
 .44' - 5" ( 533" )

 Length
 .40' - 6" ( 486" )

 Width
 .10" - 3" ( 123" )

 Height
 .14' - 2-3/4" ( 170.8" )

WHEEL BASE

TRACTIVE EFFORT †

Starting (35% adhesion) . . . . . . . . 90,000 lb.

**SPEED** 

Maximum . . . . . . . . . . . . 25 mph ( 40 km/hr )

MINIMUM CURVE

100 foot radius (30 degrees)

**ENGINES** 

One 300 - 800 hp diesel \*

**GENERATORS** 

Brushless alternator

**TRACTION MOTORS** 

D-77 or D-78 (3 units)

**FUEL CAPACITY** 

300 gallons and up

CONTROL

AAR Standard

**AIR BRAKES** 


Type 26 L

AIR COMPRESSOR

Rotary Screw Type - 200 CFM





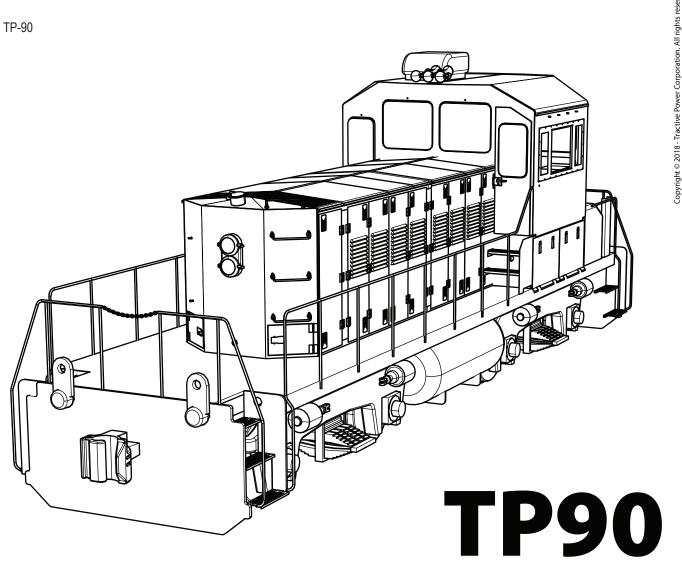

\* Optional engine manufacturers such as Catepillar, Cummins, MTU, John Deere.
To meet US EPA and other government agencies requirements. Natural gas or
electric also available. The TP90 is also available in different variations depending
on the chassiss.

## 4 AXLE INDUSTRIAL LOCOMOTIVE - TRACTIVE POWER CORP.


NOTES: FOR DISCUSSION PURPOSES ONLY. DIMENSIONS MAY NOT BE TO SCALE & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT CIRCULATE DOCUMENT WITHOUT OUR EXPRESSED PERMISSION.

SCALE: NOT TO SCALE	PREPARED BY: KM	VERSION: 1.01
DATE: 22-FEB-2018	FILE: TP90_SPECS_01.PDF	PAGE: 1 OF 2






Contract Manufactured by Curry Rail Systems with certifications:

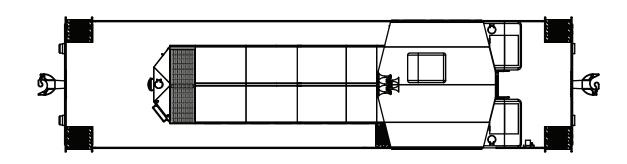

## **TP90**

## **TOP VIEW**

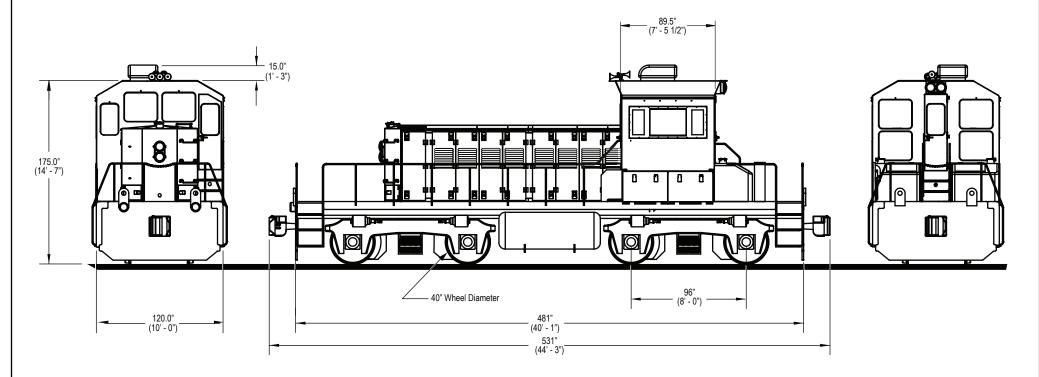

FRONT VIEW SIDE VIEW BACK VIEW



tractivepowercorp.com

NOTES: FOR DISCUSSION PURPOSES ONLY. DIMENSIONS MAY NOT BE TO SCALE & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. DO NOT CIRCULATE DOCUMENT WITHOUT OUR EXPRESSED PERMISSION.

4 AXLE INDUSTRIAL LOCOMOTIVE - TRACTIVE POWER CORP.

SCALE: NOT TO SCALEPREPARED BY: KMVERSION: 1.03DATE: 22-FEB-2018FILE: TP90\_SPECS\_02.PDFPAGE: 2 OF 2